

## Specifications

### Materials


Heaterjacket: Reinforced silicone rubber fabric  
 Insulator: ¼ or ½ inch thick closed-cell silicone rubber foam  
 Fasteners: ½ inch diameter metal snaps with nylon cover standard

### Electrical

Watt density: 1 to 2 inch diameter: 1.5 W/in ;  
 3 to 4 inch diameter: 1.25 W/in

Voltage: 120V or 208V standard, other voltages available  
 Power leads: 4inch long #18 AWG, UL 1180/CSA 10A rated  
 Connectors: Positive locking Mate-N-Lok

Temperature range: ≤200°C

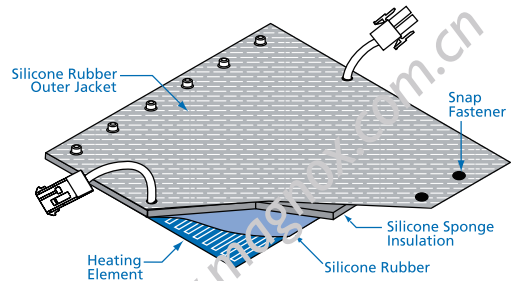


### Features

- ◆ Even heating up to 200°C
- ◆ High temperature cloth heaters for heating up to 450°C
- ◆ High temperature cloth heaters for heating up to 450°C
- ◆ Heaters are interconnect able up to a 10A circuit
- ◆ Integrates with standard controllers
- ◆ Built-in insulation with insulated lead wires
- ◆ UL recognized construction
- ◆ One year warranty
- ◆ Easy on/off with reclosable fasteners
- ◆ Trimable, tight contact fit
- ◆ ¼ or ½ inch thick closed cell silicone rubber
- ◆ ¼ to 2 inch fiberglass based insulation for cloth heaters
- ◆ 120V or 208V standard, 208V available at no charge, replace "-3" with "-2" in model number, other voltages are also available

### Benefits


- ◆ Reduced system downtime
- ◆ Improved heat transfer minimizing cold spots
- ◆ Clean room compatible
- ◆ Combine standard parts to cover custom lines
- ◆ Adjustable temperatures
- ◆ Modular heating system

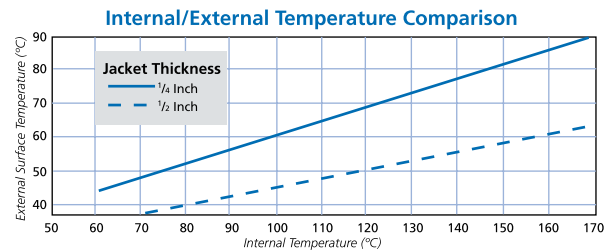

## Heater Jackets Ordering Information


### 加热套订购信息

6631	0200 0100	RT																																														
产品系列	尺寸A 尺寸B	产品类型																																														
66231 真空加热套	<table border="1"> <tr><td>0100</td><td>1"</td><td>0100</td><td>1"</td></tr> <tr><td>0150</td><td>1 1/2"</td><td>0150</td><td>1 1/2"</td></tr> <tr><td>0200</td><td>2"</td><td>0200</td><td>2"</td></tr> <tr><td>0250</td><td>2 1/2"</td><td>0250</td><td>2 1/2"</td></tr> <tr><td>0300</td><td>1"</td><td>0300</td><td>1"</td></tr> <tr><td>0400</td><td>3"</td><td>0400</td><td>3"</td></tr> <tr><td>0500</td><td>5"</td><td>0500</td><td>5"</td></tr> <tr><td>0600</td><td>6"</td><td>0600</td><td>6"</td></tr> </table>	0100	1"	0100	1"	0150	1 1/2"	0150	1 1/2"	0200	2"	0200	2"	0250	2 1/2"	0250	2 1/2"	0300	1"	0300	1"	0400	3"	0400	3"	0500	5"	0500	5"	0600	6"	0600	6"	<table border="1"> <tr><td>TB</td><td>管道</td></tr> <tr><td>FG</td><td>法兰</td></tr> <tr><td>EB</td><td>90°弯头</td></tr> <tr><td>HEB</td><td>45°弯头</td></tr> <tr><td>ET</td><td>等径三通</td></tr> <tr><td>RT</td><td>变径三通</td></tr> <tr><td>RC</td><td>锥形变径</td></tr> </table>	TB	管道	FG	法兰	EB	90°弯头	HEB	45°弯头	ET	等径三通	RT	变径三通	RC	锥形变径
0100	1"	0100	1"																																													
0150	1 1/2"	0150	1 1/2"																																													
0200	2"	0200	2"																																													
0250	2 1/2"	0250	2 1/2"																																													
0300	1"	0300	1"																																													
0400	3"	0400	3"																																													
0500	5"	0500	5"																																													
0600	6"	0600	6"																																													
TB	管道																																															
FG	法兰																																															
EB	90°弯头																																															
HEB	45°弯头																																															
ET	等径三通																																															
RT	变径三通																																															
RC	锥形变径																																															

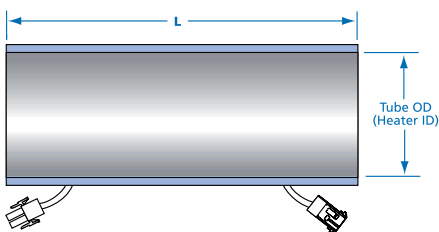


### 1/2" Thick Heater Jackets Tube OD


Flange Size	Length
1.5"(38.1)	OPTION
2"(50.8)	OPTION
2.5"(63.2)	OPTION
3"(76.2)	OPTION
4"(101.6)	OPTION




90° Radius Elbow		
Tube OD	Length L	Radius R
1½	2.00	2.25
2	2.75	3.00
3	4.00	4.50
4	5.50	6.00



45° Radius Elbow		
Tube OD	Length L	Radius R
1½	0.69	2.25
2	1.00	3.00
3	1.37	4.50
4	2.00	6.00

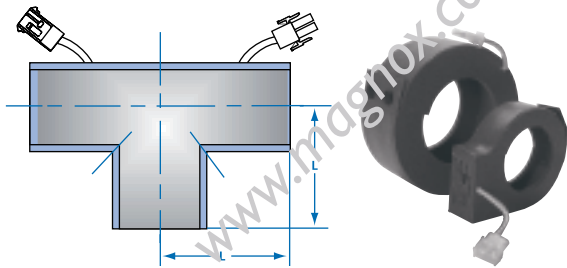

Tee Heater Jackets		
Flange Type	Tube OD	Length L
NW-25	1½	2
NW-40	2	2¾
NW-50	3	3
ISO-80	3	3
ISO-100	3	3



Conical Heater Jackets			
Thickness	A	B	Length L
¼	1½	2	1 ⅜
¼	2	3	2 ⅞
¼	2	4	2 ⅝
¼	3	4	2 ⅝